


TOMORROW'S LIGHTING FOR A GREENER PLANET

LED T8 Tube



Built-in driver
without ballast.

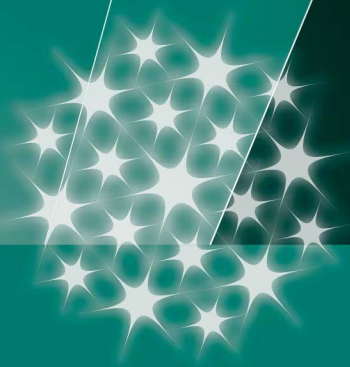

MODEL #	Output Power (W)	Volt (V)	Frequency (HZ)	CCT (k)	CRI	Beam Angle(°)
LED T8 4Feet	18	AC120-277	60	4000/5000	≥83	240°
Dimmable	Material	Color	Base	Life (H)	Lumen(LM)	Size
No	Glass+PET	White	G13	50000	1800	D1" * L47 1/4"



Direct replacement
for fluorescent tube with instant start
electronic ballast without re-wiring.

- Replaces T8 32W Fluorescent Tube
- Connects directly to any existing fixture
- No Re-Wiring Required
- Operates with any Quality "Instant Start" Fluorescent Ballast



MODEL #	Output Power (W)	Output Lumen (lm)	CCT (k)	CRI	Beam Angle(°)	Dimmable
LED T8 4Feet	22	2300/2400	4000/5000	85	>240°	No
Material	Color	Base	Life (H)	Working Environment	Working Humidity	Size
Glass+PC	White	G13	50000	-25°C ~ 55°C	≤95%	D1" * L1 1/7"